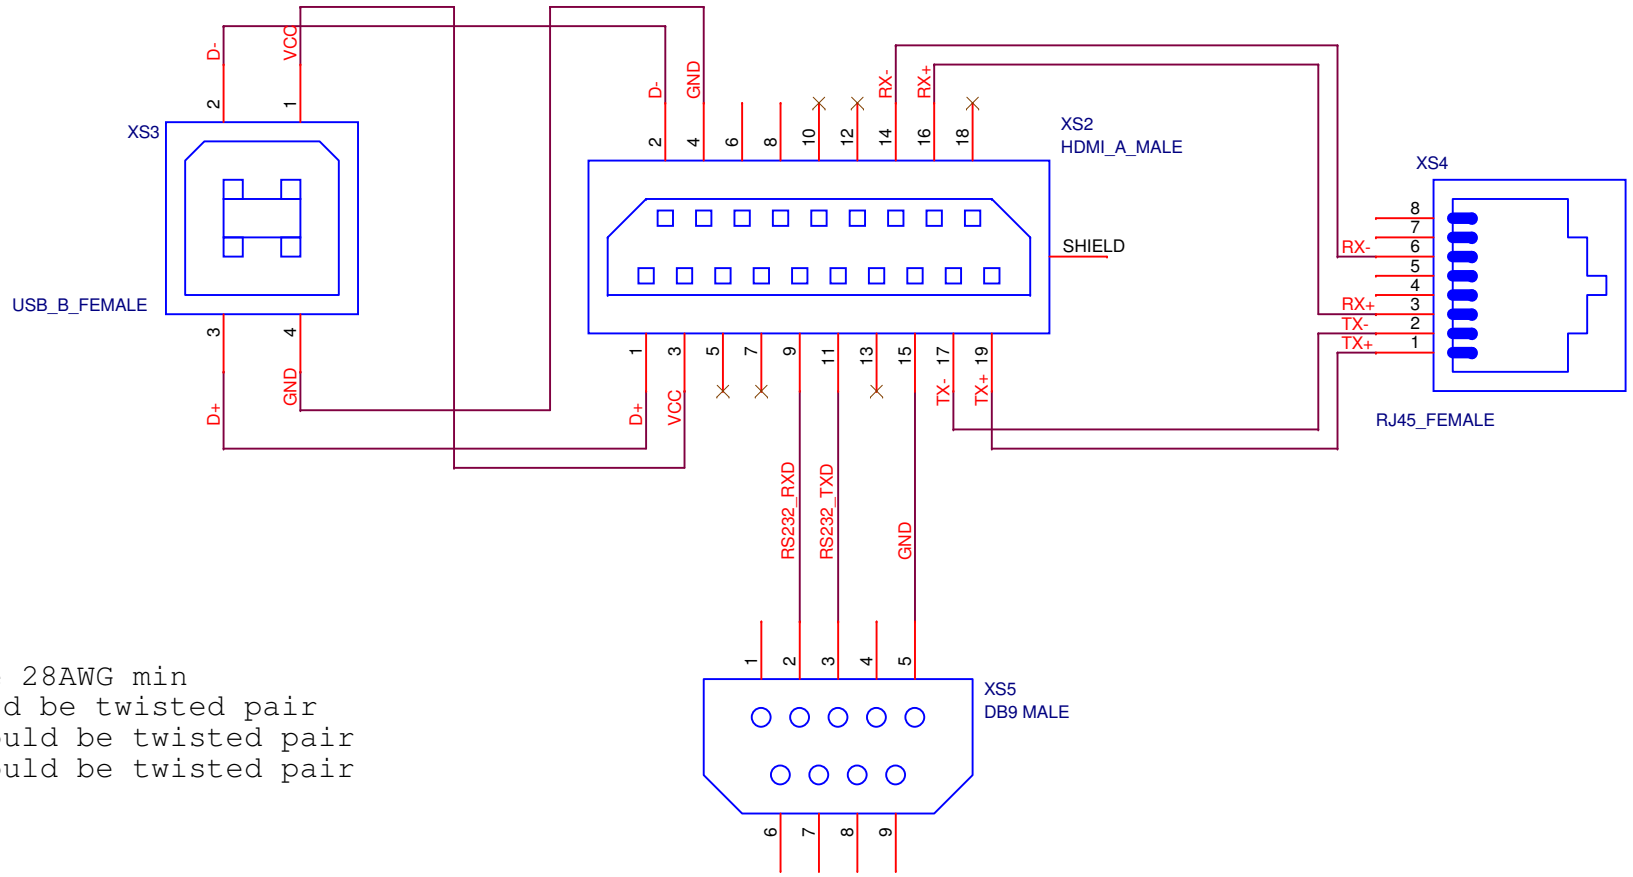

Wires should be 28AWG min
D- and D+ should be twisted pair
TX- and TX+ should be twisted pair
RX- and RX+ should be twisted pair

Title	P7100 UNIVERSAL CABLE	
Size A4	Document Number <Doc>	Rev 1
Date: Wednesday, March 01, 2017	Sheet 1 of 1	